

Personalised Gaming: A Motivation and Overview of Literature

Sander Bakkes
Games Studio
School of Software
University of Technology
Sydney
Australia

sanderbakkes@gmail.com

Chek Tien Tan
Games Studio
School of Software
University of Technology
Sydney
Australia

chektien.tan@uts.edu.au

Yusuf Pisan
Games Studio
School of Software
University of Technology
Sydney
Australia

yusuf.pisan@uts.edu.au

ABSTRACT

This article focuses on personalised games, which we define as games that utilise player models for the purpose of tailoring the game experience to the individual player. The main contribution of the article is a motivation for personalised gaming, supported by an extensive overview of scientific literature. The motivation concerns (a) the psychological foundation, (b) the effect on player satisfaction, (c) the contribution to game development, and (d) the requirement for achieving ambitions. The provided overview of scientific literature goes into the subject of player modelling, as well as eight adaptive components: (1) space adaptation, (2) mission / task adaptation, (3) character adaptation, (4) game mechanics adaptation, (5) narrative adaptation, (6) music / sound adaptation, (7) player matching (multiplayer), and (8) difficulty scaling. In the concluding sections, the relationship to procedural content generation is discussed, as well as the generalisation to other domains.

Keywords

Personalisation, player modelling, adaptation, video games

1. INTRODUCTION

Recently, it can be observed that there is a shift in focus towards the design of video games for individuals, so as to increase perceived value [18]. Indeed, a benefit of such player-centred design is that it ideally results in enhanced gameplay experiences for players regardless of gender, age or experience [15, 16, 71, 105]. Though it is indicated that player-centred game design approaches can be applied to all stages of the game development process [105], a comparison study shows that in practice its application is limited to (1) market research and pre-production play testing, (2) pre-release usability and play testing, (3) post-release maintenance, (4) empowering players with control, and (5) in-game player support systems [103]. It results in games

Permission to make digital or hard copies of part or all of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than ACM must be honored. Abstracting with credit is permitted. To copy otherwise, to republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee.

IE '12, July 21 - 22 2012, Auckland, NZ, New Zealand.

Copyright 2012 ACM 978-1-4503-1410-7/12/07...\$10.00.

focused on a limited demographic, wherein by design the individual player is not considered specifically.

It is argued that we are now at a unique point where modern computer technology, simulation, and artificial intelligence (AI) have opened up the possibility that more can be done with regard to *on-demand and just-in-time personalisation* [85]. With computational techniques available that model a player's behaviour, experience, and satisfaction, games that are truly personalised are within reach. Here, we define a personalised game as follows:

A personalised game is a game that utilises player models for the purpose of tailoring the game experience to the individual player.

At this point, we need to make a precise distinction between 'personalised' and the related term 'adaptive'. Indeed, tailoring the game experience to a player is implemented by adapting part of the game (e.g., the artificial intelligence of game characters). When game adaptations are not informed by the actual player in one way or the other, we refer to the game as being *strictly adaptive*. When, on the other hand, the adaptations are informed by the player, e.g. by determining automatically the difficulty level appropriate to the current player, we refer to the game as being personalised (albeit, in a modest way). In this regard, a game that is *strictly personalised* is a game in which every single component of the game is tailored to the individual player; a goal that may be practically unachievable to even the most ambitious of game designers.

In this article, we provide a motivation for personalised gaming, and provide an extensive overview of scientific literature with regard to required components (player modelling) and optional components (space adaptation, mission / task adaptation, character adaptation, game mechanics adaptation, narrative adaptation, music / sound adaptation, player matching (multiplayer), and difficulty scaling). The scope of the article concerns *video games*, where insight on generalisation to other domains is provided in the discussion section.

The outline of the article is as follows. We first discuss the motivation for incorporating personalisation techniques in the domain of video games (Section 2). Subsequently, we go further into a required component of personalised games: player modelling (Section 3). Next, we discuss optional components of a personalised game, together with the advances

being made herein (Section 4). Then, we discuss the relationship to procedural content generation (PCG) and go into the subject of generalisation to other domains (Section 5). Finally, a conclusion is provided (Section 6).

2. WHY PERSONALISATION?

Research and development of personalized games has numerous motivations, of which we highlight the psychological foundation (2.1), the effect on player satisfaction (2.2), the contribution to game development (2.3), and the requirement for achieving ambitions (2.4). We hereby attempt to provide a holistic perspective on the motivations of existing personalisation work.

2.1 Psychological foundation

Studies on persuasion reveal a significantly increased involvement and extensive cognitive elaboration when subjects are exposed to content of personal relevance [81, 82]. Concomitant with the greater attention, studies show that more highly involved individuals (i.e., subjects in the high personal relevance condition) will exhibit stronger emotional reactions when they are in a high elaborative frame of mind [25]. A seminal work on emotion theory by Izard [54] hypothesizes that emotion will have substantial and measurable effects on cognition and action when the stimulus or situation is a personally or socially significant one.

This matches the so-called appraisal theory (e.g., [59]), according to which a necessary and sufficient condition for emotion is that the person's current life situation is appraised as impinging significantly on personal concerns. In layman terms, an event has to matter to the person experiencing it to cause emotion [77].

Now, an important question is: what makes events personally important in this way? Part of the answer to this question is that events often achieve their personal significance in the course of ongoing social encounters and the development of relationships between people [77]. Another part of the answer is that particular emotional significance is also defined by broader cultural value systems (e.g., [65, 88]). An observation herein, relevant to game design, is that emotions depend on events that impact on the progress of personal projects (e.g., [14, 40, 67]); pursuits common to all members of the species (e.g., food, shelter, sex) as well as culturally supplied aims such as wealth, reputation, freedom and self-esteem. Adequately modelling the target demographic, but foremost the individual player herein, provides additional tools for designing personally-significant game experiences.

Psychological studies showed that a proper fit between personality and environment can raise productivity and/or satisfaction [56]. These findings imply that when applied to a game environment, player satisfaction will benefit from a correct fit between personality and environment [93]. Similar arguments can be made with regard to maintaining player immersion [68, 109] and flow [22], though we consider such detailed discussions outside the scope of the present article.

2.2 Effect on player satisfaction

Players are now expecting a more personalised gaming experience as personalisation has begun to filter into most

games [124]. Research has suggested that game personalisation raises player loyalty and enjoyment, which in turn makes gaming experience a (commercial) success [110, 115]. This supports the overarching thesis that an appropriate fit between characteristics of the player and gaming technology results in greater enjoyment [37].

In recent years, it has been possible in many video games for players to design and personalise their own in-game characters. In a study by Fischer [39], it was predicted that this innovation could lead to elevations in the intensity of the psychological effects of video games. Process analyses by [39] revealed that participants playing a violent video game with a personalized game character experienced more arousal and self-activation than they did when playing with an impersonal, default game character, which in turn increased aggressive responses. A follow-up study by Hollingdale [51] confirmed these findings.

One may reasonably assume that the results generalise to other video-game genres, particularly as it has already been shown that acting prosocially increases empathy and decreases *schadenfreude* in prosocial games [47, 48, 49], and that video racing games increase risk-taking inclination [38]. Personalisation of game characters may indeed accentuate the indicated effects.

2.3 Contribution to game development

The perspective of AI researchers to increase the engagement and enjoyment of the player, is one that is consistent with the perspective of game designers [85]. That is, where usability and user modelling for other software may be based on productivity alone, games require an additional factor that accounts for the quality of the user experience in playing a game [21].

Riedl [85] correctly states that scaling of tailored experiences requires intelligent systems that “can take progressively more responsibility for the player's experience by automating tasks such as design of level, NPC behaviors and dialogue, plot and quests, and game mechanics themselves”. These tasks have historically been the domain of human creative designers, actors, dungeon masters, and so on. The decisions that need to be made about the player's experience, however, can only be made in a just-in-time and on-demand fashion. That is, the system needs to know (a) who the user is, (b) what the user needs, preferences, and desires are, and (c) what the user is doing at any given moment [85]. Achieving scalable personalization requires work towards practical human-level computational creativity; a goal aspired by both researchers and game developers.

Much in the same way as procedural content generation is used in the game LEFT 4 DEAD to increase the output of the development team and promote replayability [11], it can be implied that personalised procedural content can enhance replayability even further.

2.4 Requirement for achieving ambitions

Though the personalisation of games generally yields ambitious connotations, an important use of personalisation in game design has already become commonplace: to provide explicit advice to the player. This was done as early as 1985

in PATTON VERSUS ROMMEL and again in 1987 with TRUST & BETRAYAL; both games being designed by Chris Crawford.

Experts have indicated that advances in game design and AI would fundamentally change the way games are designed [57, 102], and allow the creation of entirely new types of games [73]. On this subject, the ambition was expressed that “advances will also allow players to have entirely unique experiences as each time you play a given scenario it will evolve differently, and will allow far richer, more realistic worlds to be created as more and more elements react more believably” [73]. Though this may be an over-enthusiastic image with regard to the current state of the industry, increasingly more research is invested in the automatic generation and personalisation of game environments, which may lead to fulfilling at least some of said ambitions.

3. PLAYER MODELLING

A personal experience in games requires the gaming system to accurately assess the individual player; it requires player modelling. Player modelling concerns establishing models of the player, and typically, exploiting the models for personalised play. A player model is an abstracted description of a player or of a player’s behaviour in a game. The general goal of player modelling is to steer the game towards a predictably high player satisfaction [116], based on the player model.

Here we highlight player behavioural modelling¹, which is of increasing importance in modern video games [41]. The main reason is that player behavioural modelling is almost a necessity when the purpose of AI is ‘entertaining the human player’ rather than ‘defeating the human player’ [116]. A challenge for such player modelling in video games is that models of the player have to be established (1) in game environments that generally are realistic and relatively complex, (2) with typically little time for observation, and (3) often with only partial observability of the environment. The on-line creation of player models, or the classification of the player into previously established models, is a task that has to be performed real-time, while other computations, such as rendering the game graphics, are performed simultaneously. Researchers estimate that generally only twenty per cent of all computing resources are available to the game AI [72]. Of this twenty per cent, a large portion will be spent on rudimentary AI behaviour, such as manoeuvring game characters within the game environment. This implies that only computationally inexpensive approaches to player modelling are suitable for incorporation in the game AI.

For the domain of modern video games, four approaches are deemed applicable to player behavioural modelling, namely (1) modelling actions, (2) modelling tactics, (3) modelling strategies, and (4) profiling a player [7]. In this taxonomy, action models concern game actions that can be observed directly or that can be inferred from other observations. Tactical models concern short-term / local game behaviour as

¹An interesting superset of player behavioural modelling, is called player experience modelling. For further reading on modelling player experience, we refer the reader to [78, 119, 121, 122]. Also, interesting related work concerns a taxonomy of player motivations in video games [8, 123].

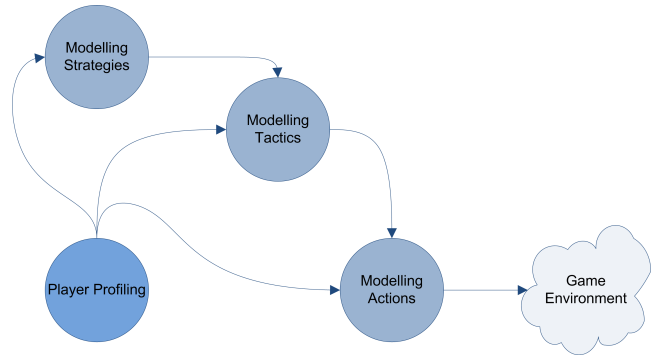


Figure 1: Taxonomy of player behavioural modelling by means of indirect measurements of the human player (i.e., utilising actual in-game observations to generate player models) [7].

composed of a series of game actions. Strategic models concern long-term / global game behaviour as composed of a series of game tactics, of which the behaviour may span the entire game, several game iterations, and across distinct games. Player profiling acknowledges that employing certain game actions, tactics, and strategies is motivated by the (psychological) profile of the player; distinct motivations and affect may result in distinct strategies, tactics, and actions. An illustration of the adopted taxonomy of player behavioural modelling is given in Figure 1. Indeed, the defined classes are not mutually exclusive; one can for instance capture player tactics and a player profile in a single model. The descriptions below are derived from [7], to which we refer the reader for references to additionally interesting literature, such as [15, 17, 52, 96, 97].

Action models. If we examine the defined classes of models respectively, we notice that they are increasingly resource-intensive to construct; however, they also increasingly generalize better. When considering the predictive capabilities of these types of models, action models attempt to do what most game developers would like player models to do, namely predict player actions. If exact future actions are known, determining a good response is relatively easy. While action prediction seems an attractive possibility of a model, in practice it is of limited use, unless the games concerned are relatively uncomplicated. The predictions of the other model types become increasingly less specific, but also more generally applicable for direct use (i.e., without requiring additional learning trials); a characteristic relevant for generalising over observations.

Tactical and strategic models have a lot of potential, especially when the goal of a game is to provide a strong challenge for the human player. Inherently, tactical and strategic models are capable of more generalisation than is possible on solely an action-state level. Hence, tactical and strategic models provide a better means for game developers to personalise and adapt the game experience and challenge to the level of individual players.

Player profiling is of a different calibre, though comprised of predominantly ongoing research. By incorporating psycho-

logically-verified knowledge in player models (e.g., the Five Factor Model of personality (FFM), cf. [27, 70]), as well as knowledge on player experience and satisfaction, player profiling may potentially have a substantial (and more directly noticeable) impact on the experience that users have with a gaming system. We note that numerous cross-domain applications exist for player modelling approaches, such as in interactive storytelling, or in gaming environments that are generated online, on the basis of a player’s behaviour and experience.

4. COMPONENTS OF A PERSONALISED GAME

To tailor the game experience to the individual player requires player models (discussed in Section 3), as well as components that use these models to adapt part of the game. Though by no means an exhaustive list, we present a set of components that will allow the vast majority of video games to be personalised.

The components, of which at least one needs to be implemented in a personalised game, are space adaptation (4.1), mission / task adaptation (4.2), character adaptation (4.3), game mechanics adaptation (4.4), narrative adaptation (4.5), music / sound adaptation (4.6), and player matching (multiplayer) (4.7). Where desired by the game designer, the components may be informed by difficulty-scaling techniques for adjusting the challenge level to the individual player (4.8). An illustration of the proposed taxonomy is given in Figure 2.

4.1 Space adaptation

A natural starting point for adaptation, and exploiting player models, is to allow the space in which the game is played to evolve in response to the actual behaviour of the player [32]. Generally, and firstly, after observing the player for a select period of time, features within the established player model may indicate that it is recommendable to transform (gradually) the game surroundings. For instance, transform from open to confined spaces, from linear to more organic environments, and from easily maneuverable corridors to intricate mazes. Secondly, variations in gameplay may be provided by, in addition, allowing events that take place within certain game spaces (e.g., particular rooms) to respond to the player’s previous behaviour. For instance, if the player models indicate that a specific player consciously avoids narrow, dark passageways, the space adaptation process may purposely generate more such passageways (e.g., in the case of a horror game), or, inversely, adapt the existing space to be less confining.

Straightforward implementations of space-adaptation techniques have been incorporated in video games such as ROGUE, DIABLO, TORCHLIGHT, SPORE, and MINECRAFT. Space adaptation, generally in the context of procedurally generated games, is an active area of research [78, 114, 98, 30, 32].

4.2 Mission / task adaptation

A promising alternative to space adaptation, is to allow the game’s mission to evolve in response to observed behaviour of the player. A strategy in this regard, is to generate a

mission that still has some open ends in its structure before constructing the space. The subsequent replacement of these open ends occurs during play, and, ideally, is directly or indirectly informed by the performance of the player. For instance, obtaining a certain in-game achievement by the player may trigger a dynamically generated parallel mission to be inserted at an open end.

In turn, the space in which the mission takes place may grow in response to the changes in the mission, or may already have accommodated all resulting possibilities. This could quite literally lead to an implementation of an interactive structure that Marie-Laure Ryan calls a fractal story; where a story keeps offering more and more detail as the player turns his attention to certain parts of the story [89].

Adapting the game’s mission in response to behaviour of the player is relatively challenging, as the game’s mission needs to be tightly controlled by the game designer. Such incorporation of the gameplay experience in the adaptation process is an important yet relatively recent direction of research [20, 1, 30, 32].

4.3 Character adaptation

The task for game AI is often focused on controlling game characters in such a way that behaviour exhibited by the characters is consistent within the game environment. In a realistic game environment, realistic character behaviour is expected. As a result, game AI that is solely focused on exhibiting the most effective behaviour is not necessarily regarded as realistic. For instance, in a typical first-person shooter (FPS) game it is not realistic if characters controlled by game AI aim with an accuracy of one hundred per cent. Game AI for shooter games, in practice, is designed to make intentional mistakes, such as warning the player of an opponent character’s whereabouts by intentionally missing the first shot [60]. Consistency of computer-controlled characters within a game environment is often established with tricks and cheats. For instance, in the game HALF-LIFE, tricks were used to establish the illusion of collaborative teamwork [58], causing human players to assume intelligence where none existed [60]. While it is true that tricks and cheats may be required to uphold consistency of the game environment, they often are implemented only to compensate for the lack of sophistication in game AI [13]. In practice, game AI in most complex games still is not consistent within the game environment, and exhibits what has been called ‘artificial stupidity’ [60] rather than artificial intelligence.

The ability of game characters to adapt to changing circumstances, has been explored with some success in previous research [26, 46, 101]. This ability is called ‘adaptive game AI’. When implemented successfully, adaptive game AI is able to fix errors in programmed game AI, and to seek counter-tactics to human gameplay. Research done by Spronck [99] indicated that machine learning techniques may be used to establish adaptive AI in complex video games. There are two different approaches in which machine learning may be applied to establish adaptive game AI, namely as (1) offline learning, and as (2) online learning. In addition, there are two different approaches in which a machine-learning technique for game AI can be controlled, namely (1) human-controlled learning, and (2) computer-controlled learning.

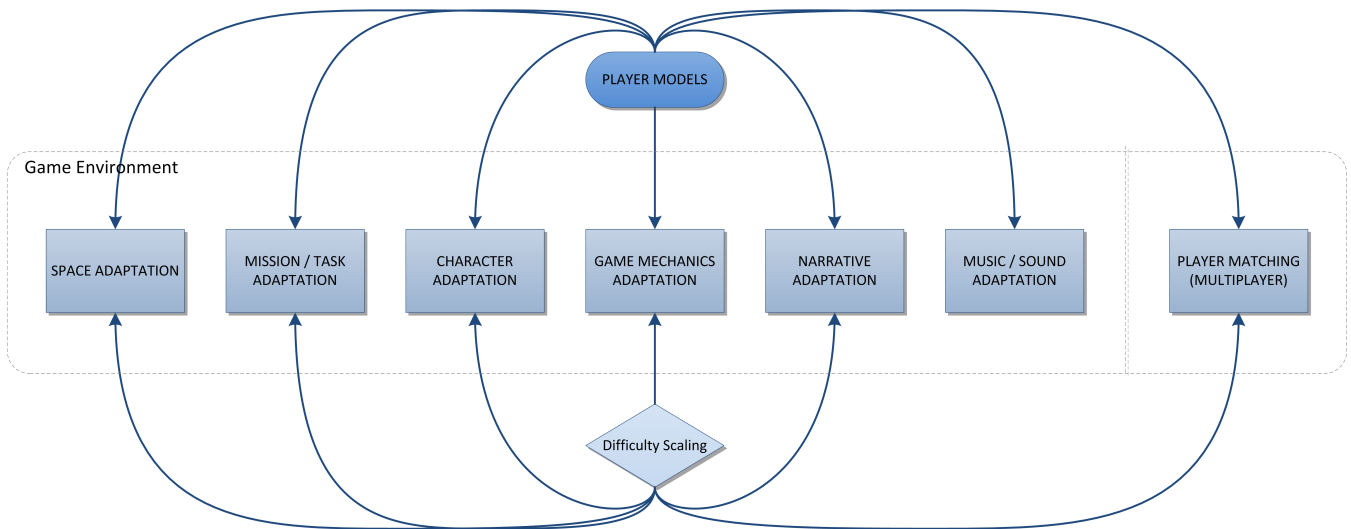


Figure 2: Personalised gaming, as resulting from player models (required) that steer at least one of the optional components (1) space adaptation, (2) mission / task adaptation, (3) character adaptation, (4) game mechanics adaptation, (5) narrative adaptation, (6) music / sound adaptation, and (7) player matching (multiplayer), while being informed by (8) difficulty-scaling techniques where desired.

For a detailed description of these approaches, the reader is referred to [4].

Generally, one can observe that learning effective behaviour while the game is in progress (i.e., ‘online’), typically requires an inefficiently large number of learning trials. In addition, it is not uncommon that a game has finished before any effective behaviour could be established, or that game characters in a game do not live sufficiently long to benefit from learning. As a result, it is difficult for players to perceive that the game AI is learning. This renders the benefits of on-line learning in video games subjective and unclear [84]. In addition, even with advanced approaches to game AI (e.g., [2, 3, 9, 95, 101]), it is often difficult to establish effective behaviour in a controlled and predictable manner. Therefore, a body of research has focused specifically on how to create rapidly and reliably effective behaviour of game AI [6, 4].

It is true that, although most research focuses on adapting the behaviour of game characters, character adaptation may also entail altering, e.g., the appearance and locomotion of characters.

4.4 Game mechanics adaptation

Though video games exist that purposely vary their game mechanics during actual gameplay, e.g., the critically acclaimed game BRAID, video games that adapt their mechanics based on the player are rare. In the game MAX PAYNE 3, a mechanism unknown to players alters the level of mechanics such as aim assistance, according to individual skills (thus adjusting shooting difficulty) [64]; a game-mechanics based application of difficulty scaling.

Research exists, however, on the automated identification of gameplay schemas and schema-based adaptation of game mechanics [61], with the goal of generating emergent game-

play [90]. A leading contributor to this line of work is Nelson and Mateas [75], who have researched automated game design for many years. Also, emergent game design is a topic being investigated by Dormans [31].

4.5 Narrative adaptation

Adapting a game’s narrative has long been the forefront of research into *interactive storytelling*. Interactive storytelling can be defined as ‘a gaming experience where the form and content of the game is customized in real time and tailored to the preferences and needs of the player to maximize enjoyment’ [12]. After all, the fundamental goal of interactivity is stated to present the user with different choices to be able to receive a highly personalised end result [104]. The challenge herein, is to support meaningful player choices without the loss of plot coherence or narrative quality [106]. The field of interactive storytelling covers a wide range of technologies and models. We refer the reader to [87] for an overview of literature.

In the context of personalisation, we observe that the domain of interactive storytelling has seen numerous advances in terms of chaining together appropriate actor actions, directing scenes toward a dramatic goal (e.g., the work of Mateas and Stern [69] on FAÇADE), or planning to achieve a learning objective [34, 23, 86].

The utilisation of player models for interactive fiction is regarded an important subject, and has been investigated by Sharma *et al.* [96]. Particularly, player-modelling techniques may enrich systems by incorporating psychologically-verified knowledge on player satisfaction and experience [7]. A promising system in this regard, is PASSAGE, an interactive storytelling system which bases its storytelling decisions on an automatically-learned model of each player’s style of play [112, 111]. In addition, a good example of per-

sonalised interactive storytelling is SSAU, a system which focuses specifically on inferring an affective preference from the player's interactions, and modulates the visual and auditory presentation of the storyworld in response [108, 107].

4.6 Music / sound adaptation

The distinguishing feature of game music is that it responds to the player to some extent [10]; a form of adaptation that has been common practice since early video games [91]. As a somewhat recent example, a game which utilizes interactive music is BANJO KAZOOIE. As you walk around, the instrumentation and scoring of the main theme gradually changes. As you approach a beach, the music becomes a reggae arrangement. As you approach a snowy mountain, a chiming Christmasy set of instruments fades in. An aquatic area features a rollicking pirate sound. The melody never changes, but the style of it is constantly adjusting to the terrain [10].

Studies state that by simultaneously enriching the worlds of video games and assisting the player's navigating the space of video games, music is essential to the semantic operations of video games [118], and is regarded as a prominent contributor to the the processes of immersion, engagement and flow in the reception of hypertext and digital narratives [33].

In this regard, expressions of emotion are crucial for increasing believability; a fundamental aspect of music is its ability to express emotions [35]. Two interesting functions of music herein, are to induce mood, and to heighten the sense of absorption (*cf.* [19]). Regarding the first function, indeed, it has been shown that music can induce mood to a listener [83]. Regarding the second function, in previous work, Gabrielson and Lindström [42] show how different factors in musical structure effects the perceived emotional expression.

Though still in relative infancy, key research into the personalisation of game music and sound is being performed. That is, Nacke *et al.* [74] have successfully studied the measurement of sonic user experience and psychophysiology. Also, Livingstone and Brown [63] implemented a prototypical gaming environment wherein the music tracks adjust in real-time to the emotion of the in-game state.

4.7 Player matching (multiplayer)

Research has shown that when opponent players play too poorly in a game against a particular player, the player loses interest in the game [94]. In addition, research has shown that when opponent players play too strongly in a game against a particular player, the player will get frustrated (i.e., 'gets stuck' in the game) and will quit playing too [62, 117]. In this regard, it is important for a gaming system to rate the skills of players accurately, and to match players with comparable skills with one-another; close enough in skill to be challenging, but not so difficult as to be frustrating [45].

Rating the skills can be based on heuristics put forward by the game developer, or by objective measures such as an ELO rating [36]; a number which expresses the relative skill of a player, as determined by winning/losing matches against other players. Now, a challenge for determining a player's skill level in numerous video games, is that (1) game outcomes often refer to team of player, while skill rating for

individual players is needed for future matchmaking, and (2) more than two players or teams compete such that the game outcome is a permutation of teams or players rather than just a winner and a loser [50]. To address these challenges, Microsoft Research developed the TRUESKILL rating system [50], which is an extension of Mark Glickman's rating system Glicko [43].

4.8 Difficulty scaling

Techniques can be applied for automatically adapting the challenge that a game poses to the skills of a human player. This is called difficulty scaling [100], or alternatively, challenge balancing [76]. When applied to game dynamics, difficulty scaling aims usually at achieving a "balanced game", i.e., a game wherein the human player is neither challenged too little, nor challenged too much.

In most games, the only implemented means of difficulty scaling is typically provided by a *difficulty setting*, i.e., a discrete parameter that determines how difficult the game will be. The purpose of a difficulty setting is to allow both novice and experienced players to enjoy the appropriate challenge that the game offers. Usually the parameter affects plain in-game properties of the game opponents, such as their physical strength. Only in exceptional cases the parameter influences the strategy of the opponents. Consequently, even on a "hard" difficulty setting, opponents may exhibit inferior behaviour, despite their, for instance, high physical strength. Because the challenge provided by a game is typically multifaceted, it is difficult for the player to estimate reliably the particular difficulty level that is appropriate for himself. Furthermore, generally only a limited set of discrete difficulty settings is available (e.g., easy, normal, and hard). This entails that the available difficulty settings are not fine-tuned to be appropriate for each player.

In recent years, researchers have developed advanced techniques for the difficulty scaling of games. Demasi and Cruz [26] used coevolutionary algorithms to train game characters that best fit the challenge level of a human player. Hunnicke and Chapman [53] explored difficulty scaling by controlling the game environment (i.e., controlling the number of weapons and power-ups available to a player). Spronck *et al.* [100] investigated three methods to adapt the difficulty of a game by automatically adjusting weights assigned to possible game strategies. In related work, Yannakakis and Hallam [120] provided a qualitative and quantitative method for measuring player entertainment in real time. Knowledge on the effect of certain game adaptations can be utilised to maintain a certain challenge level (*cf.* [6, 5]), and may be incorporated to steer the procedural generation of game content (*cf.* [32]).

Finally, techniques for *game pacing* are gradually being implemented in actual video games. For instance, the game LEFT 4 DEAD automatically adjusts the game pacing to maximize player excitement / game intensity [11]. The technique is implemented by estimating and tracking the 'emotional intensity' of the players. If the intensity is deemed too high, major threats are remove temporarily, otherwise, interesting threats are created on-the-fly. Another example is the game UNCHARTED 3, which in certain scenarios subtly decreases the speed of the game if players die repeatedly in

the concerning scenario [55].

5. DISCUSSION

We conclude the overview of literature with a discussion on the relationship of personalised gaming to procedural content generation (5.1) and insight on personalisation in other gaming domains (5.2).

5.1 The relationship to procedural content generation

In the domain of video games, procedurally generated content is considered to be of increasing importance to the computer-game development in the present and in the future; both offline, for making the game development process more efficient (design of content such as environments and animations now consume a major part of the development budget for most commercial games), and online, for enabling new types of games based on player-adapted content [78, 32].

Here we should be explicit on the relationship of personalised gaming to procedural content generation (PCG). Personalised gaming is about tailoring the game content to the individual player (which does not necessarily require game content to be generated automatically). PCG is about the automatic generation of game content (which does not necessarily entail the content is tailored to the individual player). Personalised gaming requires content to be *tailored* to the individual player, while the method for doing so is open. Take, as a minimal example, a mobile picture puzzle that is personalised using real-world camera input [66]. As another example, educational games may provide a personalised learning experience based on adequately estimating the player's skills [79]. It is true, however, that for many types of games and for numerous tasks, procedural content generation may indeed be the preferred method for tailoring content to the player. For instance, the feasibility of procedurally generating a personalised race track has been demonstrated by Togelius [113].

For further reading, an article by Yannakakis and Togelius [122] provides an overview of experience-driven procedural content generation. Also, research by Lopes and Bidarra [64] provides an in-depth study on adaptivity challenges in games and simulations, foremost in the context of adaptivity and procedural content generation.

5.2 Generalisation to other domains

In this article, we focused on personalisation in video games. Indeed, to a large extent personalisation techniques can generalise to other gaming domains. First, a clear contribution lies in the domain of *educational games* (and by extension, other serious games), where personalised learning has already indicated its benefits [80, 79, 44]. Second, *ambient games* have been shown to benefit from player behavioural analysis for adapting the game context [92, 24]. Third, in classic games (e.g., CHESS), it has been shown that accurately modelling the opponent player can increase the playing strength [28, 29], but moreover can be applied for scaling the playing strength to be appropriate to the human player [116], for entertainment purposes.

Analogues to the concepts in [122], player modelling and

adaptation techniques required for personalised gaming are regarded as applicable to other human-computer interaction (HCI) domains, such as recommender systems, web 2.0 applications, interface design and computational creativity and art. Here, the user driving the generation process, and the designer deciding on a high-level which type of adaptations to make available, provides an innovative mixture of both user-driven and design-driven content creation [122].

6. CONCLUSION

In this article we focused on personalised games, which we defined as games that utilise player models for the purpose of tailoring the game experience to the individual player. The main contribution of the article is a motivation for personalised gaming, supported by an extensive overview of scientific literature. Indeed, research and development of personalized games has numerous motivations, of which we highlighted the psychological foundation, the effect on player satisfaction, the contribution to game development, and the requirement for achieving ambitions.

In a proposed taxonomy of personalised gaming, player modelling techniques are a requirement for steering adaptive components that a game may have. Acknowledging that by no means an exhaustive list of such components can be established, the article investigated literature with regard to (1) space adaptation, (2) mission / task adaptation, (3) character adaptation, (4) game mechanics adaptation, (5) narrative adaptation, (6) music / sound adaptation, (7) player matching (multiplayer), and (8) difficulty scaling. In a concluding discussion of the article, the relationship to procedural content generation (PCG) was discussed, as well as the generalisation to other domains.

For future work, the main challenge is in the combination of personalisation techniques, and in its incorporation into a game's design. Indeed, with personalisation directly and positively influencing the game experience, game design is expected to develop into an increasingly less predetermined direction.

Acknowledgments. The authors wish to thank the anonymous referees for their constructive comments that helped to improve the article considerably.

7. REFERENCES

- [1] E. Adams and A. Rollings. *Fundamentals of Game Design*. Game Design and Development. Prentice Hall, Upper Saddle River, New Jersey, USA, sep 2006.
- [2] D. W. Aha, M. Molineaux, and M. J. V. Ponsen. Learning to win: Case-based plan selection in a real-time strategy game. In H. Muñoz-Avila and F. Ricci, editors, *Proceedings of the 6th International Conference on Case-Based Reasoning (ICCBR 2005)*, pages 5–20. DePaul University, Chicago, Illinois, USA, 2005.
- [3] B. Auslander, S. Lee-Urban, C. Hogg, and H. Muñoz-Avila. Recognizing the enemy: Combining reinforcement learning with strategy selection using case-based reasoning. In K.-D. Althoff, R. Bergmann, M. Minor, and A. Hanft, editors, *Proceedings of the 9th European Conference on Case-Based Reasoning (ECCBR 2008)*, pages 59–73. University of Trier, Trier, Germany, 2008.
- [4] S. C. J. Bakkes. *Rapid Adaptation of Video Games AI*. PhD thesis, Tilburg centre for Creative Computing

- (TiCC), Tilburg University, Tilburg, The Netherlands, 2010.
- [5] S. C. J. Bakkes, P. H. M. Spronck, and H. J. Van den Herik. Opponent modelling for case-based adaptive game AI. *Entertainment Computing*, 1(1):27–37, 2009.
 - [6] S. C. J. Bakkes, P. H. M. Spronck, and H. J. Van den Herik. Rapid and reliable adaptation of video game AI. *IEEE Transactions on Computational Intelligence and AI in Games*, 1(2):93–104, 2009.
 - [7] S. C. J. Bakkes, P. H. M. Spronck, and G. van Lankveld. Player behavioural modelling for video games. *Entertainment Computing*, 2012. Special Issue on Games and AI. 10.1016/j.entcom.2011.12.001.
 - [8] R. Bartle. Hearts, clubs, diamonds, spades: Players who suit muds. *Journal of MUD research*, 1(1):19, 1996.
 - [9] R. Baumgarten, S. Colton, and M. Morris. Combining AI methods for learning bots in a real-time strategy game. *International Journal on Computer Game Technologies*, 2009, 2009. Article ID 129075. Special issue on Artificial Intelligence for Computer Games.
 - [10] M. Belinkie. Video game music: not just kid stuff. *Video Game Music*, 15, 1999. [Online] Available: http://www.vastdifference.com/nintendo/nsf/research/Video%20game%20music_%20not%20just%20kid%20stuff.pdf.
 - [11] M. Booth. The ai systems of left 4 dead. In *Keynote, Fifth Artificial Intelligence and Interactive Digital Entertainment Conference (AIIDE09)*, 2009.
 - [12] B. Bostan and T. Marsh. The interactive of interactive storytelling: Customizing the gaming experience. *Entertainment Computing-ICEC 2010*, pages 472–475, 2010.
 - [13] M. Buro and T. M. Furtak. RTS games and real-time AI research. In *Proceedings of the Behavior Representation in Modeling and Simulation Conference (BRIMS)*, pages 34–41. Simulation Interoperability Standards Organization (SISO), Arlington, Virginia, USA, 2004.
 - [14] C. Carver and M. Scheier. Origins and functions of positive and negative affect: A control-process view. *Psychological review*, 97(1):19, 1990.
 - [15] D. Charles and M. Black. Dynamic player modeling: A framework for player-centered digital games. In Q. H. Mehdi, N. E. Gough, and D. Al-Dabass, editors, *Proceedings of Computer Games: Artificial Intelligence, Design and Education (CGAIDE 2004)*, pages 29–35. University of Wolverhampton, Wolverhampton, UK, 2004.
 - [16] D. Charles, A. Kerr, M. McAlister, M. McNeil, J. Kücklich, M. Black, A. Moore, and K. Stringer. Player-centred game design: Adaptive digital games. In *Changing Views: Worlds in Play (DIGRA 2005 Conference)*, pages 103–423, 2005.
 - [17] D. Charles, M. McNeill, M. McAlister, M. Black, A. Moore, K. Stringer, J. Kücklich, and A. Kerr. Player-centered design: Player modeling and adaptive digital games. In *Proceedings of the DiGRA Conference.: Changing Views World in Play*, pages 285–298, 2005.
 - [18] A. Chiou and K. Wong. Player adaptive entertainment computing (paec): mechanism to model user satisfaction by using neuro linguistic programming (nlp) techniques. In *Computational Intelligence and Games, 2008. CIG'08. IEEE Symposium On*, pages 343–349. IEEE, 2008.
 - [19] A. Cohen. The functions of music in multimedia: A cognitive approach. *Music, mind, and science*, pages 53–69, 1999.
 - [20] B. Cousins. Elementary game design. *Develop magazine*, 10 2004.
 - [21] B. Cowley, D. Charles, M. Black, and R. Hickey. User-system-experience model for user centered design in computer games. In *Adaptive Hypermedia and Adaptive Web-Based Systems*, pages 419–424. Springer, 2006.
 - [22] B. Cowley, D. Charles, M. Black, and R. Hickey. Toward an understanding of flow in video games. *Computers in Entertainment (CIE)*, 6(2):20, 2008.
 - [23] C. Crawford. *Chris Crawford on Interactive Storytelling (New Riders Games)*. New Riders Games, 2004.
 - [24] N. Dansey, B. Stevens, and R. Eglin. Contextually-ambiguous pervasive games: an exploratory study. *Breaking New Ground: Innovation in Games, Play, Practice and Theory. Proceedings of DiGRA 2009*, 2009.
 - [25] W. Darley and J. Lim. The effect of consumers' emotional reactions on behavioral intention: The moderating role of personal relevance and self-monitoring. *Psychology and Marketing*, 9(4):329–346, 1992.
 - [26] P. Demasi and A. J. de. O. Cruz. Online coevolution for action games. *International Journal of Intelligent Games and Simulation*, 2(3):80–88, 2002.
 - [27] J. Digman. Personality structure: Emergence of the five-factor model. *Annual review of psychology*, 41(1):417–440, 1990.
 - [28] H. H. L. M. Donkers, J. W. H. M. Uiterwijk, and H. J. Van den Herik. Probabilistic opponent-model search. *Information Sciences*, 135(3–4):123–149, 2001.
 - [29] H. H. L. M. Donkers, J. W. H. M. Uiterwijk, and H. J. Van den Herik. Admissibility in opponent-model search. *Information Sciences*, 154(3–4):119–140, 2003.
 - [30] J. Dormans. Adventures in level design: Generating missions and spaces for action adventure games. In *Proceedings of the Foundations of Digital Games Conference (FDG)*, 2010.
 - [31] J. Dormans. *Engineering emergence: applied theory for game design*. PhD thesis, University of Amsterdam, Amsterdam, The Netherlands, 2012.
 - [32] J. Dormans and S. C. J. Bakkes. Generating missions and spaces for adaptable play experiences. *IEEE Transactions on Computational Intelligence and AI in Games*, 3(3):216–228, sep 2011. Special Issue on Procedural Content Generation, DOI 10.1109/TCIAIG.2011.2149523.
 - [33] J. Douglas and A. Hargadon. The pleasures of immersion and engagement: Schemas, scripts and the fifth business. *Digital Creativity*, 12(3):153–166, 2001.
 - [34] M. S. El-Nasr. Interaction, narrative, and drama: Creating an adaptive interactive narrative using performance arts theories. *Interaction Studies*, 8(2):209–240, 2007.
 - [35] M. Eladhari, R. Nieuwdorp, and M. Fridenfolk. The soundtrack of your mind: Mind music-adaptive audio for game characters. In *Proceedings of the 2006 ACM SIGCHI international conference on Advances in computer entertainment technology*, page 54. ACM, 2006.
 - [36] A. Elo. *The rating of chessplayers, past and present*, volume 3. Batsford London, 1978.
 - [37] X. Fang and F. Zhao. Personality and enjoyment of computer game play. *Computers in Industry*, 61(4):342–349, 2010.
 - [38] P. Fischer, T. Greitemeyer, T. Morton, A. Kastenmüller, T. Postmes, D. Frey, J. Kubitzki, and J. Odenwälder. The racing-game effect: Why do video racing games increase risk-taking inclinations? *Personality and Social Psychology Bulletin*, 35(10):1395–1409, 2009.
 - [39] P. Fischer, A. Kastenmüller, and T. Greitemeyer. Media violence and the self: The impact of personalized gaming characters in aggressive video games on aggressive behavior. *Journal of Experimental Social Psychology*, 46(1):192–195, 2010.
 - [40] N. Frijda. *The Emotions*. Studies in Emotion and Social Interaction. Cambridge University Press, 1986.
 - [41] J. Fürnkranz. Recent advances in machine learning and game playing. *ÖGAI-Journal*, 26(2):19–28, 2007.
 - [42] A. Gabrielsson and E. Lindström. *The influence of musical structure on emotional expression*. Oxford University Press, 2001.
 - [43] M. Glickman. The glicko system. *Boston University*, 1995.
 - [44] S. Göbel, V. Wendel, C. Ritter, and R. Steinmetz. Personalized, adaptive digital educational games using

- narrative game-based learning objects. *Entertainment for Education. Digital Techniques and Systems*, pages 438–445, 2010.
- [45] T. Graepel and R. Herbrich. Ranking and matchmaking. *Game Developer Magazine*, pages 25–34, 2006. October, 2006.
- [46] T. Graepel, R. Herbrich, and J. Gold. Learning to fight. In Q. H. Mehdi, N. E. Gough, and D. Al-Dabass, editors, *Proceedings of Computer Games: Artificial Intelligence, Design and Education (CGAIDE 2004)*, pages 193–200. University of Wolverhampton, Wolverhampton, UK, 2004.
- [47] T. Greitemeyer, M. Agthe, R. Turner, and C. Gschwendtner. Acting prosocially reduces retaliation: Effects of prosocial video games on aggressive behavior. *European Journal of Social Psychology*, 2012.
- [48] T. Greitemeyer and S. Osswald. Effects of prosocial video games on prosocial behavior. *Journal of Personality and Social Psychology*, 98(2):211, 2010.
- [49] T. Greitemeyer, S. Osswald, and M. Brauer. Playing prosocial video games increases empathy and decreases schadenfreude. *Emotion*, 10(6):796, 2010.
- [50] R. Herbrich, T. Minka, and T. Graepel. TrueskillŽ: A bayesian skill rating system. *Advances in Neural Information Processing Systems*, 19:569, 2007.
- [51] J. Hollingdale and T. Greitemeyer. The changing face of aggression: The effect of personalized avatars in a violent video game on levels of aggressive behavior. *Journal of Applied Social Psychology*, 2012. In press.
- [52] R. Houlette. Player modeling for adaptive games. In *AI Game Programming Wisdom 2*, pages 557–566. Charles River Media, Inc., Hingham, Massachusetts, USA, 2004.
- [53] R. Hunicke and V. Chapman. AI for dynamic difficulty adjustment in games. In *AAAI Workshop on Challenges in Game Artificial Intelligence*, pages 91–96. AAAI Press, Menlo Park, California, USA, 2004.
- [54] C. Izard. Emotion theory and research: Highlights, unanswered questions, and emerging issues. *Annual review of psychology*, 60:1, 2009.
- [55] R. Krekel. Interview on game on television program, 2012. #5, February 13th, 2012.
- [56] A. L. KRISTOF. Person-organization fit: An integrative review of its conceptualizations, measurement, and implications. *Personnel Psychology*, 49(1):1–49, 1996.
- [57] J. E. Laird and M. Van Lent. Human-level AI’s killer application: Interactive computer games. *AI Magazine*, 22(2):15–25, 2001.
- [58] R. Laursen and D. Nielsen. Investigating small scale combat situations in real-time-strategy computer games. Master’s thesis, Department of Computer Science, University of Aarhus, Aarhus, Denmark, 2005.
- [59] R. Lazarus. *Emotion and adaptation*. Oxford University Press, USA, 1991.
- [60] L. Lidén. Artificial stupidity: The art of making intentional mistakes. In S. Rabin, editor, *AI Game Programming Wisdom 2*, pages 41–48. Charles River Media, Inc., Hingham, Massachusetts, USA, 2004.
- [61] C. Lindley and C. Sennersten. Game play schemas: from player analysis to adaptive game mechanics. In *Proceedings of the 2006 international conference on Game research and development*, pages 47–53. Murdoch University, 2006.
- [62] D. Livingstone and D. Charles. Intelligent interfaces for digital games. In D. Fu, S. Henke, , and J. Orkin, editors, *Proceedings of the AAAI-04 Workshop on Challenges in Game Artificial Intelligence*, pages 6–10, 2004.
- [63] S. Livingstone and A. Brown. Dynamic response: real-time adaptation for music emotion. In *Proceedings of the second Australasian conference on Interactive entertainment*, pages 105–111. Creativity & Cognition Studios Press, 2005.
- [64] R. Lopes and R. Bidarra. Adaptivity challenges in games and simulations: a survey. *Computational Intelligence and AI in Games, IEEE Transactions on*, 3(2):85–99, 2011.
- [65] C. Lutz. *Unnatural emotions: everyday sentiments on a Micronesian atoll & their challenge to western theory*. University of Chicago Press, 1988.
- [66] S. Mahamad, E. Mazlan, R. Kasbon, K. Khalid, and N. Rusdi. Personalised mobile picture puzzle. *World Academy of Science, Engineering and Technology*, 25:233–238, 2007.
- [67] G. Mandler. *Mind and body: Psychology of emotion and stress*. WW Norton New York, 1984.
- [68] L. Manovich. *The Language of New Media*. MIT Press, Cambridge, Massachusetts, USA, 2002.
- [69] M. Mateas and A. Stern. Procedural authorship: A case-study of the interactive drama Façade. *Digital Arts and Culture (DAC)*, 2005.
- [70] R. McCrae and P. Costa Jr. Personality trait structure as a human universal. *American Psychologist; American Psychologist*, 52(5):509, 1997.
- [71] B. Medler. Using recommendation systems to adapt gameplay. *International Journal of Gaming and Computer-Mediated Simulations*, 1(3):2009, 2009.
- [72] I. Millington. *Artificial Intelligence for Games*. Morgan Kaufmann Publishers, San Francisco, California, USA, 2006.
- [73] P. D. Molyneux. The future of game AI - Lecture. Imperial College London, London, UK, 2006. October 4, 2006.
- [74] L. Nacke, M. Grimshaw, and C. Lindley. More than a feeling: Measurement of sonic user experience and psychophysiology in a first-person shooter game. *Interacting with Computers*, 22(5):336–343, 2010.
- [75] M. Nelson and M. Mateas. Towards automated game design. *AI* IA 2007: Artificial Intelligence and Human-Oriented Computing*, pages 626–637, 2007.
- [76] J. K. Olesen, G. N. Yannakakis, and J. Hallam. Real-time challenge balance in an RTS game using rtNEAT. In P. Hingston and L. Barone, editors, *Proceedings of the IEEE 2008 Symposium on Computational Intelligence and Games (CIG’08)*, pages 87–94, 2008.
- [77] B. Parkinson. Emotions are social. *British journal of psychology*, 87(4):663–683, 1996.
- [78] C. Pedersen, J. Togelius, and G. N. Yannakakis. Modeling Player Experience for Content Creation. *IEEE Transactions on Computational Intelligence and AI in Games*, 1(2):121–133, 2009.
- [79] N. Peirce, O. Conlan, and V. Wade. Adaptive educational games: Providing non-invasive personalised learning experiences. In *Digital Games and Intelligent Toys Based Education, 2008 Second IEEE International Conference on*, pages 28–35. Ieee, 2008.
- [80] N. Peirce and V. Wade. Personalised learning for casual games: The language trap’online language learning game. In *4th European Conference on Game Based Learning (ECGBL), Copenhagen, Denmark*, pages 21–22, 2010.
- [81] R. Petty and J. Cacioppo. Issue involvement can increase or decrease persuasion by enhancing message-relevant cognitive responses. *Journal of personality and social psychology*, 37(10):1915, 1979.
- [82] R. Petty, J. Cacioppo, and D. Schumann. Central and peripheral routes to advertising effectiveness: The moderating role of involvement. *Journal of consumer research*, pages 135–146, 1983.
- [83] M. Pignatiello, C. Camp, and L. Rasar. Musical mood induction: An alternative to the velten technique. *Journal of Abnormal Psychology*, 95(3):295–297, 1986.
- [84] S. Rabin. Preface. In S. Rabin, editor, *AI Game Programming Wisdom 4*, pages ix–xi. Charles River Media, Inc., Hingham, Massachusetts, USA, 2008.
- [85] M. Riedl. Scalable personalization of interactive experiences through creative automation. *Computers in Entertainment (CIE)*, 8(4):26, 2010.
- [86] M. Riedl and A. Stern. Believable agents and intelligent

- story adaptation for interactive storytelling. *Technologies for Interactive Digital Storytelling and Entertainment*, pages 1–12, 2006.
- [87] M. Riedl, D. Thue, and V. Bulitko. Game AI as storytelling. *Artificial Intelligence for Computer Games*, 125, 2011.
- [88] M. Rosaldo. Toward an anthropology of self and feeling. *Culture theory: Essays on mind, self, and emotion*, 1984.
- [89] M. Ryan. *Narrative as virtual reality: Immersion and interactivity in literature and electronic media*. Johns Hopkins University Press Baltimore, MD, USA, 2001.
- [90] K. Salen and E. Zimmerman. *Rules of play: Game design fundamentals*. The MIT Press, 2004.
- [91] B. Schmidt. Designing sound tracks for coin-op games or computer music for under \$65.00. In *Proceedings of the 1989 International Computer Music Conference*, pages 273–276. Ann Arbor, MI: MPublishing, University of Michigan Library, 1989.
- [92] B. Schouten, R. Tieben, A. Ven, and D. Schouten. Human behavior analysis in ambient gaming and playful interaction. *Computer Analysis of Human Behavior*, pages 387–403, 2011.
- [93] S. Schreurs. The road to adaptive gameplay. Master’s thesis, Tilburg University, 2011.
- [94] B. Scott. The illusion of intelligence. In S. Rabin, editor, *AI Game Programming Wisdom*, pages 16–20. Charles River Media, Inc., Hingham, Massachusetts, USA, 2002.
- [95] M. Sharma, M. Holmes, J. Santamaria, A. Irani, C. Isbell, and A. Ram. Transfer learning in real-time strategy games using hybrid CBR/RL. In M. M. Veloso, editor, *Proceedings of the 20th International Joint Conference on Artificial Intelligence (IJCAI 2007)*, pages 1041–1046. AAAI Press, Menlo Park, California, USA, 2007.
- [96] M. Sharma, M. Mehta, S. Ontanón, and A. Ram. Player modeling evaluation for interactive fiction. In *Proceedings of the AIIDE 2007 Workshop on Optimizing Player Satisfaction*, pages 19–24, 2007.
- [97] A. M. Smith, C. Lewis, K. Hullet, G. Smith, and A. Sullivan. An inclusive view of player modeling, 2011. In Proceedings of the 2011 International Conference on the Foundations of Digital Games (FDG 2011).
- [98] G. Smith, M. Treanor, J. Whitehead, and M. Mateas. Rhythm-based level generation for 2D platformers. In *Proceedings of the 2009 International Conference on the Foundations of Digital Games, Orlando, FL*, pages 175–182, 2009.
- [99] P. H. M. Spronck. *Adaptive Game AI*. PhD thesis, Faculty of Humanities and Sciences, Maastricht University, Maastricht, The Netherlands, 2005.
- [100] P. H. M. Spronck, I. G. Sprinkhuizen-Kuyper, and E. O. Postma. Difficulty scaling of game AI. In A. E. Rhalibi and D. Van Welden, editors, *Proceedings of the 5th International Conference on Intelligent Games and Simulation (GAMEON’2004)*, pages 33–37. EUROSIS-ETI, Ghent University, Ghent, Belgium, 2004.
- [101] P. H. M. Spronck, I. G. Sprinkhuizen-Kuyper, and E. O. Postma. Online adaptation of game opponent AI with dynamic scripting. *International Journal of Intelligent Games and Simulation*, 3(1):45–53, 2004.
- [102] A. Stern. Ai beyond computer games. In *AAAI AI and Interactive Entertainment Spring Symposium 2000*, 1999.
- [103] J. Stewart. Different approaches to implementating player centered game design: A comparison study, 2007. Bachelor’s thesis, Murdoch University, Mount Hawthorn, Australia.
- [104] S. Sundar. Social psychology of interactivity in human-website interaction. *The Oxford handbook of Internet psychology*, pages 89–104, 2007.
- [105] J. Sykes and M. Federoff. Player-centred game design. In *CHI’06 extended abstracts on Human factors in computing systems*, pages 1731–1734. ACM, 2006.
- [106] J. Tanenbaum. Imagining new design spaces for interactive digital storytelling. *Interactive Storytelling*, pages 261–271, 2011.
- [107] J. Tanenbaum and A. Tomizu. Affective interaction design and narrative presentation. In *AAAI 2007 Fall Symposium on Intelligent Narrative Technologies*, 2007.
- [108] J. Tanenbaum and A. Tomizu. Narrative meaning creation in interactive storytelling. *International Journal of Computational Science*, 2(1), 2008.
- [109] L. N. Taylor. Video games: Perspective, point-of-view, and immersion. Master’s thesis, Graduate Art School, University of Florida, Gainesville, Florida, USA, 2002.
- [110] C. Teng. Customization, immersion satisfaction, and online gamer loyalty. *Computers in Human Behavior*, 26(6):1547–1554, 2010.
- [111] D. Thue, V. Bulitko, M. Spetch, and E. Wasylishen. Interactive storytelling: A player modelling approach. In *Artificial Intelligence and Interactive Digital Entertainment conference, Stanford, CA*, pages 43–48, 2007.
- [112] D. J. Thue, V. Bulitko, and M. Spetch. Player modeling for interactive storytelling: A practical approach. In S. Rabin, editor, *AI Game Programming Wisdom 4*, pages 633–646. Charles River Media, Inc., Hingham, Massachusetts, USA, 2008.
- [113] J. Togelius, R. De Nardi, and S. Lucas. Towards automatic personalised content creation for racing games. In *Computational Intelligence and Games, 2007. CIG 2007. IEEE Symposium on*, pages 252–259. IEEE, 2007.
- [114] J. Togelius, M. Preuss, and G. N. Yannakakis. Towards multiobjective procedural map generation. In *Proceedings of the 2010 International Conference on the Foundations of Digital Games, Monterey, CA*, page #3, 2010.
- [115] S. Turky and S. Adinolf. Free to be me: a survey study on customization with world of warcraft and city of heroes/villains players. *Procedia-Social and Behavioral Sciences*, 2(2):1840–1845, 2010.
- [116] H. J. Van den Herik, H. H. L. M. Donkers, and P. H. M. Spronck. Opponent modelling and commercial games. In G. Kendall and S. Lucas, editors, *Proceedings of the IEEE 2005 Symposium on Computational Intelligence and Games (CIG’05)*, pages 15–25, 2005.
- [117] G. Van Lankveld, P. H. M. Spronck, and H. J. Van den Herik. Incongruity-based adaptive game balancing. In H. J. Van den Herik and P. H. M. Spronck, editors, *Proceedings of the 12th Advances in Computer Games conference (ACG12)*, pages 208–220, 2009.
- [118] Z. Whalen. Play along-an approach to videogame music. *Game Studies*, 4(1), 2004.
- [119] G. N. Yannakakis. How to model and augment player satisfaction: A review. In K. Berkling, D. Giuliani, and A. Potamianos, editors, *Proceedings of the 1st Workshop on Child, Computer and Interaction (ICMI’08 post-conference workshop)*, page (Invited paper). ACM Press, Montreal, Canada, oct 2008.
- [120] G. N. Yannakakis and J. Hallam. Towards optimizing entertainment in computer games. *Applied Artificial Intelligence*, 21(10):933–971, 2007.
- [121] G. N. Yannakakis, M. Maragoudakis, and J. Hallam. Preference learning for cognitive modeling: a case study on entertainment preferences. *IEEE Transactions on Systems, Man, and Cybernetics, Part A: Systems and Humans*, 39(6):1165–1175, 2009.
- [122] G. N. Yannakakis and J. Togelius. Experience-driven procedural content generation. *Affective Computing, IEEE Transactions on*, 2(3):147–161, 2011.
- [123] N. Yee. Motivations for play in online games. *CyberPsychology & Behavior*, 9(6):772–775, 2006.
- [124] D. Zad, M. Angelides, and H. Agius. Personalise your massively multiplayer online game (mmog) with artemis. *Multimedia Systems*, pages 1–26, 2012.